




INFINITI
ELECTRO-OPTICS

LWIR & MWIR Cameras Brochure

Infiniti's Thermal Imaging Camera Options

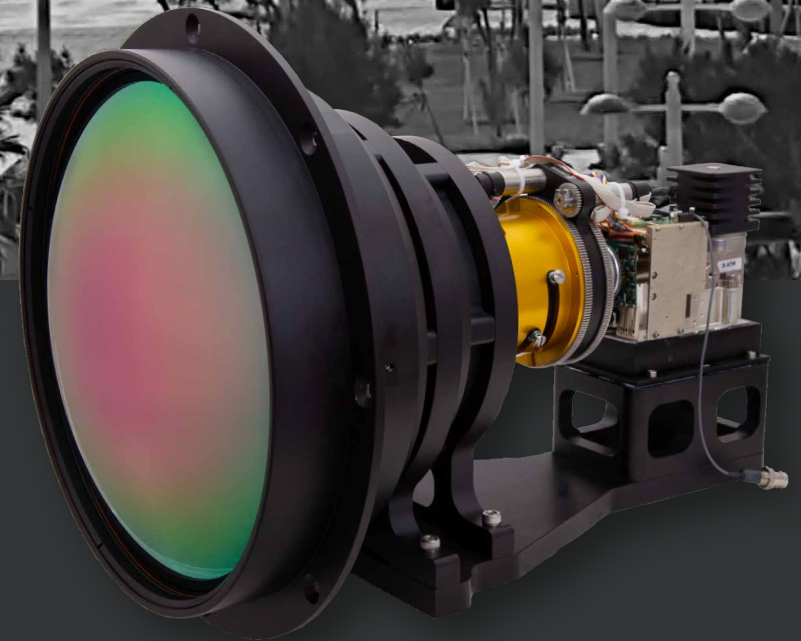

TECHNOLOGY

Thermal Imaging Advantages


Infiniti offers both cooled MWIR and uncooled LWIR thermal imaging cameras. These cameras are called thermal cameras because they produce an image using naturally radiated thermal energy (heat) from objects rather than reflected light like a visible/NIR camera. This can provide great advantages in surveillance, as no illumination is needed to see in complete darkness, and it is possible to achieve long-range detection of potential threats.

With thermal imaging, warm objects like humans, vehicles and animals become clearly visible against a colder background. Warmer objects like these can be easily located and tracked with thermal imaging cameras regardless of lighting conditions. This makes thermal imaging an excellent solution for detection of threats at long distances, even at night.

Another advantage of thermal cameras over visible cameras is their immunity to bright lights. When using standard visible or NIR camera systems at night, bright lights from vehicle headlights or even a flashlight can cause overexposures and light flares on the images, making it difficult or impossible to see details and activities around those lights. Thermal imaging is unaffected in these scenarios and maintains a clear and detailed image even around bright light sources.



Standard Visible+NIR
Forest fires with smoke

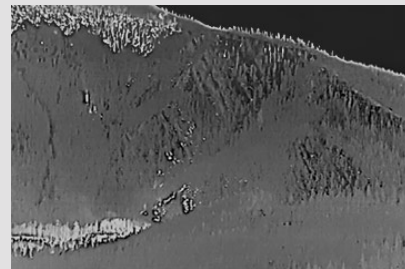

LWIR Thermal Image
Same scene, sees through smoke



Standard Visible+NIR Image
Vis+NIR scene



LWIR Thermal Image
Same scene, see video on our website for full example:
<https://www.infiniioptics.com/video/why-thermal-imaging-ideal-247-threat-detection>

TECHNOLOGY

Cooled vs Uncooled

Long Wave Infrared (LWIR)

Infiniti uses cutting-edge 12 μ m LWIR VOx uncooled thermal sensors with resolutions of 384x288 up to 1280x1024 HD. The 12 μ m pixel pitch provides a narrower field of view without changing the lens. This means we are able to achieve 40% further range than 17 μ m and 25% further range than 15 μ m sensors while delivering a sensitivity of less than 0.03°C.

These sensors are paired with precision-engineered germanium lenses from wide-angle to long-range views. Our lenses have large apertures of f/1.0-f/1.3 compared to the standard f/1.5-f/1.6, allowing up to 2.3 times more heat to reach the sensor. This results in higher sensitivity, sharper images, and longer ranges making LWIR one of the most cost-effective long-range imaging solutions. Infiniti offers some of the longest range LWIR cameras with a 410mm lens currently in development which is equivalent to a 580mm lens on a traditional 17 μ m LWIR camera.

Cooled Mid-Wave Infrared (MWIR)

Infiniti offers cooled thermal in SD or HD options. Our 15 μ m 640x480 InSb or MCT sensors are comparable to the standard MWIR offerings in the industry. Our 10 μ m 1280x1024 HD X-Hot sensor provides 400% higher resolution and 50% longer range than traditional 15 μ m sensors. This means a 400mm lens on our X-Hot sensor is equivalent to a 600mm lens on a traditional 15 μ m sensor allowing it to provide a narrower angle for more detail at long distances.

MWIR sensors use integrated cryo-coolers to cool the sensors down to -196°C (InSb) or -123°C (X-Hot). This exponentially increases the sensitivity of the thermal camera. This allows MWIR cameras to use smaller and more powerful lenses than uncooled LWIR cameras, however the cryo-coolers do require maintenance at regular intervals of approximately 8000-25,000 hours.

Our wide variety of MWIR sensors and lenses range from a 19-275mm f/5.5 zoom (28.4°-2.0° HFOV) with SD resolution to a 92-1200mm f/4.0 zoom lens (7.9°-0.61° HFOV) with HD resolution, capable of human detection at over 50km based on DRI ratings in ideal conditions.



280mm
LWIR

1400mm
MWIR



19mm
LWIR

RATING STANDARDS

DRI Ratings



Thermal camera performance is often measured in DRI, which stands for Detection, Recognition and Identification. While some military personnel will understand these ratings, it is important to note that many end users are not familiar with what these ratings actually mean, and it is likely to be different than expected.

DRI: A misleading specification






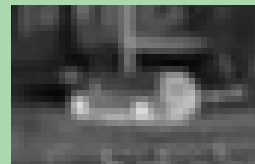
DRI ratings are based on a specification from the 1950s called the Johnson Criteria which was developed around older sensor technology being displayed on low resolution CRT screens. The images on this page show the approximate level of detail required by the Johnson Criteria. If you show them to most end users, it is unlikely they will agree that these images represent their expectations of Detection, Recognition, and Identification. Infiniti lists these DRI numbers to offer simple comparisons with competing products; however our recommendation is to define thermal detail using Pixels Per Meter (PPM).

Human
(1.8m × 0.5m)

Vehicle
(2.2m × 2.2m)

PPM: A better specification

PPM takes several factors into account to provide a single benchmark for the amount of detail provided by a camera which can be applied to any brand or model. Infiniti has developed a tool which simulates different lens and sensor combinations to display various PPM levels; this allows us to ensure our customers are getting the level of detail they require.

Detection	Recognition	Identification
 <p>3.5 × 1 pixels / 2.1 ppm (Something is there)</p>	 <p>11 × 3 pixels / 6.3 ppm (A person is there)</p>	 <p>23 × 6 pixels / 12.6 ppm (The person looks like a civilian)</p>
 <p>2 × 2 pixels / 0.9 ppm (Something is there)</p>	 <p>6 × 6 pixels / 2.7 ppm (A vehicle is there)</p>	 <p>12 × 12 pixels / 5.5 ppm (The vehicle looks like a minivan)</p>

The examples here simulate the amount of detail if you were to digitally zoom into the image. **Please note that these image simulations assume optimum imaging conditions, however many factors such as atmospheric conditions, heat waves, available light, subject motion or camera shake can degrade image clarity, and most of these issues are amplified at longer distances.** Also note that the Johnson Criteria specification is based on a 50% probability that an object would be detected, recognized or identified at these distances (ignoring atmospheric factors).

For more information, please see our whitepaper about understanding DRI measurements at: www.infinitioptics.com/dri

Specifications



		4TI	6TI	9TI	13TI	19TI	25TI
Image Sensor		Uncooled Vanadium Oxide Microbolometer, 30Hz					
Resolution		384×288, 640×512 or 1280×1024 pixels					
Pixel Pitch		12μm					
Focal Length		4mm f/1.2	5.75mm f/1.2	9mm f/1.2	13mm f/1.2	19mm f/1.0	25mm f/1.0
Pixels Per Meter @ 1km		0.33ppm	0.42ppm	0.75ppm	1.08ppm	1.58ppm	2.08ppm
Field of View	384×288	59.9° Horizontal FOV	49.5° Horizontal FOV	28.7° Horizontal FOV	20.1° Horizontal FOV	13.8° Horizontal FOV	10.5° Horizontal FOV
	640×512	87.7° Horizontal FOV	75° Horizontal FOV	46.2° Horizontal FOV	32.9° Horizontal FOV	22.9° Horizontal FOV	17.5° Horizontal FOV
	1280×1024	125° Horizontal FOV	114° Horizontal FOV	81° Horizontal FOV	61.1° Horizontal FOV	44° Horizontal FOV	34.2° Horizontal FOV
Human DRI*	Detection	158m (519ft)	228m (747ft)	356m (1,169ft)	515m (1,688ft)	752m (2,447ft)	990m (3,246ft)
	Recognition	53m (173ft)	76m (249ft)	119m (390ft)	172m (563ft)	251m (822ft)	330m (1,082ft)
	Identification	26m (87ft)	38m (124ft)	59m (195ft)	86m (281ft)	125m (411ft)	165m (541ft)
Vehicle DRI*	Detection	367m (1,203ft)	527m (1,729ft)	825m (2,706ft)	1,192m (3,909ft)	1,742m (5,713ft)	2,292m (7,517ft)
	Recognition	122m (401ft)	176m (576ft)	275m (902ft)	397m (1,303ft)	581m (1,904ft)	764m (2,506ft)
	Identification	61m (200ft)	88m (288ft)	138m (451ft)	199m (651ft)	290m (952ft)	382m (1,253ft)
Drone DRI** (Small/Lrg)	Detection	41m / 211m	59m / 303m	92m / 474m	133m / 685m	194m / 1,000m	255m / 1,318m
	Recognition	14m / 70m	20m / 101m	31m / 158m	44m / 228m	65m / 334m	85m / 439m
	Identification	7m / 35m	10m / 51m	15m / 79m	22m / 114m	32m / 167m	43m / 220m
Focus	Athermalized	Athermalized	Athermalized	Athermalized	Athermalized	Athermalized	Athermalized
Spectral Range	7,000-14,000nm						
Thermal Sensitivity	20-30mK						
Image Display Modes	White Hot, other color palettes available upon request						
Digital Zoom	1-8X Digital Zoom (depending on system)						
Video Output	CVBS (Analog) Output, optional IP encoders available						
Pan/Tilt Compatibility	Any system					Triton and up	Atlas and up†

* DRI detection ratings are based on industry standards (Johnson's Criteria) that can be misleading if not properly understood. Please see our whitepaper about understanding DRI measurements at: www.infiniitioptics.com/dri

** See DRI rating disclaimer above; Small distance based on 0.3m×0.2m target size (dimensions of a DJI Phantom), Large distance based on 2m×0.8m target size (dimensions of a DJI Agras T40/T30).

† Dependent on full system configuration.

Specifications



		35TI	55TI	75TI	100TI	120TI
Image Sensor		Uncooled Vanadium Oxide Microbolometer, 30Hz				
Resolution		384×288, 640×512 or 1280×1024 pixels				
Pixel Pitch		12μm				
Focal Length		35mm f/1.0	55mm f/1.0	75mm f/1.2 or f/1.0	100mm f/1.0	120mm f/1.4
Pixels Per Meter @ 1km		2.92ppm	4.58ppm	6.25ppm	8.33ppm	10.0ppm
Field of View	384×288	7.53° Horizontal FOV	4.80° Horizontal FOV	3.52° Horizontal FOV	2.64° Horizontal FOV	2.2° Horizontal FOV
	640×512	12.5° Horizontal FOV	7.99° Horizontal FOV	5.86° Horizontal FOV	4.4° Horizontal FOV	3.67° Horizontal FOV
	1280×1024	24.8° Horizontal FOV	15.9° Horizontal FOV	11.7° Horizontal FOV	8.78° Horizontal FOV	7.32° Horizontal FOV
Human DRI*	Detection	1,385m (4,544 ft)	2,613m (8,569 ft)	2,969m (9,738 ft)	3,958m (12,983 ft)	4,750m (15,550 ft)
	Recognition	462m (1,515 ft)	871m (2,856 ft)	990m (3,246 ft)	1,319m (4,328 ft)	1,583m (5,193 ft)
	Identification	231m (757 ft)	435m (1,428 ft)	495m (1,623 ft)	660m (2,164 ft)	792m (2,597 ft)
Vehicle DRI*	Detection	3,208m (10,523 ft)	6,050m (19,844 ft)	6,875m (22,550 ft)	9,167m (30,067 ft)	11,000m (36,080 ft)
	Recognition	1,069m (3,508 ft)	2,017m (6,615 ft)	2,292m (7,517 ft)	3,056m (10,022 ft)	3,667m (12,027 ft)
	Identification	535m (1,754 ft)	1,008m (3,307 ft)	1,146m (3,758 ft)	1,528m (5,011 ft)	1,833m (6,013 ft)
Drone DRI** (Small/Lrg)	Detection	357m / 1,845m	561m / 2,899m	765m / 3,953m	1,021m / 5,270m	1,225m / 6,325m
	Recognition	119m / 615m	187m / 966m	255m / 1,318m	340m / 1,757m	408m / 2,108m
	Identification	60m / 307m	94m / 483m	128m / 659m	170m / 878m	204m / 1,054m
Focus	Athermalized	Athermalized	Motorized (f/1.2) or Athermalized (f/1.0)	Motorized or Athermalized	Motorized	
Spectral Range	7,000-14,000nm					
Thermal Sensitivity	20-30mK					
Image Display Modes	White Hot, other color palettes available upon request					
Digital Zoom	1-8X Digital Zoom (depending on system)					
Video Output	CVBS (Analog) Output, optional IP encoders available					
Pan/Tilt Compatibility	Atlas and up	Eclipse and up		Sentry and up	Eclipse and up†	

* DRI detection ratings are based on industry standards (Johnson's Criteria) that can be misleading if not properly understood. Please see our whitepaper about understanding DRI measurements at: www.infiniioptics.com/dri

** See DRI rating disclaimer above; Small distance based on 0.3m×0.2m target size (dimensions of a DJI Phantom), Large distance based on 2m×0.8m target size (dimensions of a DJI Agras T40/T30).

† Dependent on full system configuration.

LWIR ZOOM CAMERA OPTIONS

Specifications



		75TIZ	105TIZ	130TIZ	155TIZ
Image Sensor		Uncooled Vanadium Oxide Microbolometer, 30Hz			
Resolution		384×288, 640×512 or 1280×1024 pixels			
Pixel Pitch		12μm			
Focal Length		26-75mm f/1.0	20-105mm f/1.2	25-130mm f/0.8-f/1.2	32-155mm f/1.2
Pixels Per Meter @ 1km		6.25ppm	8.75ppm	10.8ppm	12.9ppm
Field of View	384×288	10.1-3.52° Horizontal FOV	13.1-2.51° Horizontal FOV	10.5-2.03° Horizontal FOV	8.2-1.70° Horizontal FOV
	640×512	16.8-5.86° Horizontal FOV	21.7-4.19° Horizontal FOV	17.5-3.38° Horizontal FOV	13.7-2.84° Horizontal FOV
	1280×1024	32.9-11.7° Horizontal FOV	42.0-8.37° Horizontal FOV	34.2-6.76° Horizontal FOV	27.0-5.67° Horizontal FOV
Human DRI*	Detection	2,969 m (1.84 mi)	4,156 m (2.6 mi)	5,146 m (3.2 mi)	6,135 m (3.81 mi)
	Recognition	990 m (0.61 mi)	1,385 m (0.86 mi)	1,715 m (1.07 mi)	2,045 m (1.27 mi)
	Identification	495 m (0.31 mi)	693 m (0.43 mi)	858 m (0.53 mi)	1,023 m (0.64 mi)
Vehicle DRI*	Detection	6,875 m (4.27 mi)	9,625 m (6 mi)	11,917 m (7.4 mi)	14,208 m (8.83 mi)
	Recognition	2,292 m (1.42 mi)	3,208 m (2 mi)	3,972 m (2.47 mi)	4,736 m (2.94 mi)
	Identification	1,146 m (0.71 mi)	1,604 m (1 mi)	1,986 m (1.23 mi)	2,368 m (1.47 mi)
Drone DRI** (Small/Lrg)	Detection	765 m / 3,953 m	1,072 m / 5,534 m	1,327 m / 6,852 m	1,582 m / 8,169 m
	Recognition	255 m / 1,318 m	357 m / 1,845 m	527 m / 2,284 m	527 m / 2,723 m
	Identification	128 m / 659 m	179 m / 922 m	264 m / 1,142 m	264 m / 1,362 m
Focus		Motorized Autofocus			
Spectral Range		7,000-14,000nm			
Thermal Sensitivity		20-30mK			
Image Display Modes		White Hot, other color palettes available upon request			
Digital Zoom		1-8X Digital Zoom (16X optional)			
Video Output		CVBS (Analog) Output, optional IP encoders available			
Pan/Tilt Compatibility		Eclipse and up	Sentry and up		

* DRI detection ratings are based on industry standards (Johnson's Criteria) that can be misleading if not properly understood. Please see our whitepaper about understanding DRI measurements at: www.infiniitioptics.com/dri

** See DRI rating disclaimer above; Small distance based on 0.3m×0.2m target size (dimensions of a DJI Phantom), Large distance based on 2m×0.8m target size (dimensions of a DJI Agras T40/T30).

LWIR ZOOM CAMERA OPTIONS

Specifications



		185TIZ	230TIZ	310TIZ	415TIZ
Image Sensor		Uncooled Vanadium Oxide Microbolometer, 30Hz			
Resolution		384×288, 640×512 or 1280×1024 pixels			
Pixel Pitch		12μm			
Focal Length		34-185mm f/1.2	26-230mm f/1.3	31-310mm f/1.3	30-415mm f/1.5
Pixels Per Meter @ 1km		15.4ppm	19.2ppm	25.8ppm	34.6ppm
Field of View	384×288	7.75-1.43° Horizontal FOV	10.1-1.15° Horizontal FOV	8.5-0.85° Horizontal FOV	N/A
	640×512	12.9-2.38° Horizontal FOV	16.8-1.91° Horizontal FOV	14.1-1.42° Horizontal FOV	14.6-1.06° Horizontal FOV
	1280×1024	25.5-4.75° Horizontal FOV	32.9-3.82° Horizontal FOV	27.8-2.84° Horizontal FOV	28.7-2.12° Horizontal FOV
Human DRI*	Detection	7,323 m (4.55 mi)	9,104 m (5.66 mi)	12,271 m (7.62 mi)	16,427 m (10.21 mi)
	Recognition	2,441 m (1.52 mi)	3,035 m (1.89 mi)	4,090 m (2.54 mi)	5,476 m (3.40 mi)
	Identification	1,220 m (0.76 mi)	1,517 m (0.94 mi)	2,045 m (1.27 mi)	2,738 m (1.70 mi)
Vehicle DRI*	Detection	16,598 m (10.54 mi)	21,083 m (13.1 mi)	28,417 m (17.66 mi)	38,042 m (23.64 mi)
	Recognition	5,653 m (3.51 mi)	7,028 m (4.37 mi)	9,472 m (5.89 mi)	12,681 m (7.88 mi)
	Identification	2,826 m (1.76 mi)	3,514 m (2.18 mi)	4,736 m (2.94 mi)	6,340 m (3.94 mi)
Drone DRI** (Small/Lrg)	Detection	1,888 m / 9,750 m	2,347 m / 12,122 m	3,164 m / 16,338 m	4,236 m / 21,872 m
	Recognition	629 m / 3,250 m	782 m / 4,041 m	1,055 m / 5,446 m	1,412 m / 7,291 m
	Identification	315 m / 1,625 m	391 m / 2,020 m	527 m / 2,723 m	706 m / 3,645 m
Focus	Motorized Autofocus				
Spectral Range	7,000-14,000nm				
Thermal Sensitivity	20-30mK				
Image Display Modes	White Hot, other color palettes available upon request				
Digital Zoom	1-8X Digital Zoom (16X optional)				
Video Output	CVBS (Analog) Output, optional IP encoders available				
Pan/Tilt Compatibility	Sentry and up			Sigma and up	

* DRI detection ratings are based on industry standards (Johnson's Criteria) that can be misleading if not properly understood. Please see our whitepaper about understanding DRI measurements at: www.infiniitioptics.com/dri

** See DRI rating disclaimer above; Small distance based on 0.3m×0.2m target size (dimensions of a DJI Phantom), Large distance based on 2m×0.8m target size (dimensions of a DJI Agras T40/T30).

MWIR SD CAMERA OPTIONS

Specifications



	275CTZ	715CTZ	875CTZ	1100CTZ	1400CTZ	
Image Sensor	High-Sensitivity Cooled InSb or MCT Detector, 30Hz					
Resolution	640×480 or 640×512 pixels					
Pixel Pitch	15µm					
Focal Length	19-275mm f/5.5	50-715mm f/5.5	38-875mm f/5.5	46-1100mm f/5.5	85-1400mm f/5.5	
Pixels Per Meter @ 1km	18.3ppm	47.7ppm	58.3ppm	73.3ppm	93.3ppm	
Field of View	28.4-2.0° Horizontal FOV	11.0-0.77° Horizontal FOV	14.4-0.63° Horizontal FOV	11.9-0.5° Horizontal FOV	6.4-0.39° Horizontal FOV	
Human DRI*	Detection	8.71 km (5.41 mi)	22.64 km (14.07 mi)	27.7 km (17.22 mi)	34.8 km (21.64 mi)	44.3 km (27.55 mi)
	Recognition	2.90 km (1.8 mi)	7.54 km (4.69 mi)	9.23 km (5.74 mi)	11.6 km (7.21 mi)	14.78 km (9.18 mi)
	Identification	1.45 km (0.9 mi)	3.77 km (2.34 mi)	4.62 km (2.87 mi)	5.8 km (3.61 mi)	7.39 km (4.59 mi)
Vehicle DRI*	Detection	20.16 km (12.53 mi)	52.43 km (32.58 mi)	55+ km (35+ mi)	55+ km (35+ mi)	55+ km (35+ mi)
	Recognition	6.72 km (4.18 mi)	17.48 km (10.86 mi)	21.39 km (13.29 mi)	26.9 km (16.71 mi)	34.2 km (21.26 mi)
	Identification	3.36 km (2.09 mi)	8.74 km (5.43 mi)	10.69 km (6.65 mi)	13.4 km (8.35 mi)	17.1 km (10.63 mi)
Drone DRI** (Small/Lrg)	Detection	2.2km / 11.6km	5.8km / 30.1km	7.14 km / 36.8km	8.9km / 46.3 km	11.4 km / 55+ km
	Recognition	748m / 3.86 km	1.9 km / 10.0 km	2.4 km / 12.3 km	3.0 km / 15.4 km	3.8 km / 19.6 km
	Identification	374 m / 1.93 km	973 m / 5.0 km	1.19 km / 6.15 km	1.5 km / 7.73 km	1.9 km / 9.84 km
Focus	Motorized Autofocus					
Spectral Range	3,000-5,000nm					
Thermal Sensitivity	20-25mK					
Image Display Modes	White Hot, other color palettes available upon request					
NUC Tables	2 NUC Tables		5-7 NUC Tables			
Digital Zoom	4X Digital Zoom (16X optional)					
Video Output	CVBS (Analog) Output, optional IP encoders available					
Cooler Lifetime (@23°C)	20,000 Hour Rated MTBF					
Pan/Tilt Compatibility	Eclipse and up	Sentry and up	Sigma and up		Vega	

* DRI detection ratings are based on industry standards (Johnson's Criteria) that can be misleading if not properly understood. Please see our whitepaper about understanding DRI measurements at: www.infiniitioptics.com/dri

** See DRI rating disclaimer above; Small distance based on 0.3m×0.2m target size (dimensions of a DJI Phantom), Large distance based on 2m×0.8m target size (dimensions of a DJI Agras T40/T30).

MWIR SD CAMERA OPTIONS

Specifications



	120CTZ	180CTZ	235CTZ	430CTZ	700CTZ	
Image Sensor	High-Sensitivity Cooled X-Hot Detector, 30Hz					
Resolution	640×480 or 640×512 pixels					
Pixel Pitch	10µm					
Focal Length	15-120mm f/3.6	25-180mm f/3.6	15-235mm f/3.6	30-430mm f/3.6	36-700mm f/3.6	
Pixels Per Meter @ 1km	12ppm	18ppm	23.5ppm	43ppm	70ppm	
Field of View	24.1-3.06° Horizontal FOV	14.6-2.04° Horizontal FOV	24.1-1.56° Horizontal FOV	12.2-0.85° Horizontal FOV	10.2-0.52° Horizontal FOV	
Human DRI*	Detection	5.7km (3.54 mi)	8.55 km (5.31 mi)	11.16 km (6.94 mi)	20.42 km (12.69 mi)	33.2 km (20.66 mi)
	Recognition	1.9 km (1.18 mi)	2.85 km (1.77 mi)	3.72 km (2.31 mi)	6.81 km (4.23 mi)	11.1 km (6.89 mi)
	Identification	950 m (0.59 mi)	1.42 km (0.89 mi)	1.86 km (1.16 mi)	3.4 km (2.12 mi)	5.5 km (3.44 mi)
Vehicle DRI*	Detection	13.2 km (8.2 mi)	19.8 km (12.3 mi)	25.85 km (16.06 mi)	47.3 km (29.39 mi)	55+ km (35+ mi)
	Recognition	4.4 km (2.73 mi)	6.6 km (4.1 mi)	8.62 km (5.35 mi)	15.77 km (9.80 mi)	25.7 km (15.95 mi)
	Identification	2.2 km (1.37 mi)	3.3 km (2.05 mi)	4.31 km (2.68 mi)	7.88 km (4.90 mi)	12.8 km (7.97 mi)
Drone DRI** (Small/Lrg)	Detection	1.47 km / 7.59 km	2.2 km / 11.3 km	2.88 km / 14.8 km	5.26 km / 27.2 km	8.57 km / 44.2 km
	Recognition	490 m / 2.53 km	735 m / 3.8 km	959 m / 4.9 km	5.76 km / 9.0 km	2.86 km / 14.8 km
	Identification	245 m / 1.26 km	367 m / 1.9 km	480 m / 2.5 km	2.88 km / 4.5 km	1.43 km / 7.4 km
Focus	Motorized Autofocus					
Spectral Range	3,000-5,000nm					
Thermal Sensitivity	20-25mK					
Image Display Modes	White Hot, other color palettes available upon request					
Digital Zoom	4X Digital Zoom (16X optional)					
Video Output	CVBS (Analog) Output, optional IP encoders available					
Cooler Lifetime (@23°C)	35,000 Hour Rated MTBF					
Pan/Tilt Compatibility	Eclipse and up			Sentry/LEOS and up	Sigma and up	

* DRI detection ratings are based on industry standards (Johnson's Criteria) that can be misleading if not properly understood. Please see our whitepaper about understanding DRI measurements at: www.infiniitioptics.com/dri

** See DRI rating disclaimer above; Small distance based on 0.3m×0.2m target size (dimensions of a DJI Phantom), Large distance based on 2m×0.8m target size (dimensions of a DJI Agras T40/T30).

MWIR HD CAMERA OPTIONS

Specifications



	260CTZ-HD	410CTZ-HD	700CTZ-HD	1015CTZ-HD	1200CTZ-HD	
Image Sensor	High-Sensitivity Cooled InSb or X-Hot Detector, 30Hz					
Resolution	1280x1024 pixels					
Pixel Pitch	10µm					
Focal Length	18-260mm f/4.0	18-410mm f/4.0	36-700mm f/4.0	55-1015mm f/4.0	92-1200mm f/4.0	
Pixels Per Meter @ 1km	26ppm	41ppm	70ppm	102ppm	120ppm	
Field of View	39.1-2.82° Horizontal FOV	39.1-1.79° Horizontal FOV	20.2-1.05° Horizontal FOV	13.3-0.72° Horizontal FOV	7.96-0.61° Horizontal FOV	
Human DRI*	Detection	12.3 km (7.67 mi)	19.5 km (12.10 mi)	33.2 km (20.66 mi)	48.2 km (29.96 mi)	55 km (34.2 mi)
	Recognition	4.12 km (2.56 mi)	6.49 km (4.03 mi)	11.1 km (6.89 mi)	16.1 km (9.99 mi)	19 km (11.81 mi)
	Identification	2.01 km (1.28 mi)	3.25 km (2.02 mi)	5.5 km (3.44 mi)	8.0 km (4.99 mi)	9.5 km (5.9 mi)
Vehicle DRI*	Detection	28.6 km (17.77 mi)	45.1 km (28.02 mi)	55+ km (35+ mi)	55+ km (35+ mi)	55+ km (35+ mi)
	Recognition	9.53 km (5.92 mi)	15.0 km (9.34 mi)	25.7 km (15.95 mi)	37.2 km (23.13 mi)	44 km (27.34 mi)
	Identification	4.77 km (2.96 mi)	7.52 km (4.67 mi)	12.8 km (7.97 mi)	18.6 km (11.56 mi)	22 km (13.67 mi)
Drone DRI** (Small/Lrg)	Detection	3.18 km / 16.4 km	5.0 km / 25.9 km	8.57 km / 44.2 km	12.4 km / 55+ km	14.7 km / 55+ km
	Recognition	1.0 km / 5.48 km	1.67 km / 8.64 km	2.86 km / 14.8 km	4.1 km / 21.4 km	4.9 km / 25.3 km
	Identification	531 m / 2.74 km	837 m / 4.32 km	1.43 km / 7.38 km	2.1 km / 10.7 km	2.45 km / 12.6 km
Focus	Motorized Autofocus					
Spectral Range	3,000-5,000nm					
Thermal Sensitivity	20-25mK					
Image Display Modes	White Hot, other color palettes available upon request					
Digital Zoom	4X Digital Zoom (16X optional)					
Video Output	CVBS (Analog) Output, optional IP encoders available					
Cooler Lifetime (@23°C)	20,000 Hour Rated MTBF (InSb) / 25,000 Hour Rated MTBF (X-Hot)					
Pan/Tilt Compatibility	Eclipse and up	Sentry/LEOS and up	Sigma and up	Vega		

* DRI detection ratings are based on industry standards (Johnson's Criteria) that can be misleading if not properly understood. Please see our whitepaper about understanding DRI measurements at: www.infiniitioptics.com/dri

** See DRI rating disclaimer above; Small distance based on 0.3m x 0.2m target size (dimensions of a DJI Phantom), Large distance based on 2m x 0.8m target size (dimensions of a DJI Agras T40/T30).

RATING COMPARISONS

DRI Ratings

Human Detection Distances

*Please see page 4 for information on how these distances are calculated and what they mean.



Vehicle Detection Distances

*Please see page 4 for information on how these distances are calculated and what they mean.

