

VIS/NIR Zoom Cameras Brochure

Infiniti's Visible/Near-Infrared Camera Options



TECHNOLOGY


VIS/NIR Sensors & Fog Filter

Infiniti's VIS/NIR zoom cameras utilize high-end CMOS sensors to offer excellent spectral sensitivity in the visible and near-infrared wavelengths of light. Optimized for long-range surveillance, they are designed with industry-leading performance and quality, offering high-quality images with resolutions ranging from HD 2MP (1080p) to UltraHD 8K/33MP.



Image Processing

Infiniti's zoom cameras integrate the latest technology in real-time image processing such as WDR (Wide Dynamic Range), BLC (Backlight Compensation), HLC (Highlight Compensation), EIS (Electronic Image Stabilization), 3D DNR (Digital Noise Reduction), Digital Defog/Haze Reduction, etc. These allow users to achieve the best image quality possible in various applications with minimal operator intervention.

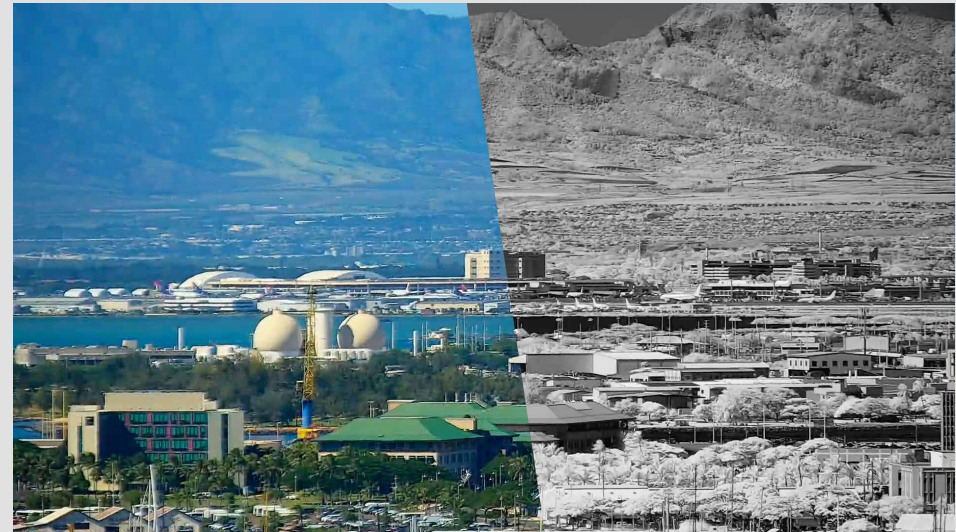

Standard Color Visible Image
(Optical Fog Filter Disabled)

NIR Image
(Optical Fog Filter Enabled)

Optical Fog Filter (NIR Only Mode)

While all of our surveillance sensors offer a nighttime NIR + visible mode for optimized sensitivity in low light, the cameras equipped with our NIR bandpass filter (also referred to as a "fog filter") allow users to isolate the NIR (near-infrared) wavelength of light during the day for clearer long-range daytime imaging.

Long-range imaging needs to see through large amounts of atmosphere which often contains particulates like smoke, haze/fog, and other atmospheric distortions. Cutting out the visible wavelength and isolating the NIR can mitigate the effects of smoke, haze and light fog, producing an image with better contrast and less distortion. Our optical fog filter lenses incorporate a motorized filter that is used with the camera's monochrome mode and de-haze image processing to see through smoke, smog and haze.

TECHNOLOGY

Zoom Lenses, Video Formats & X-Factor

Continuous Zoom Lenses

Infiniti's precision engineered IR-corrected zoom lenses are built with high quality optical glass and feature integrated rapid auto focus. We offer a wide range of focal lengths with optical zoom factors from 24X up to 135X zoom and a maximum focal length of 2075mm. Paired with the surveillance-optimized 1/2" sensor, our 2075mm lens has the equivalent field of view of a "full-frame" DSLR camera with a 10,000mm lens.

Video Formats

Infiniti's network zoom cameras feature RTSP video streams for compatibility with most VMS and C2 softwares. Video streams can be accessed anywhere in the world using a variety of devices including mobile phones and tablets. When paired with our Octagon platform, advanced control of zoom cameras, pan/tilts, ZLID™ illuminators, LRFs, and other devices can all be performed over standard IP networks.

Network zoom cameras are often preferred for their flexibility and ease of transmission over wired or wireless networks. However, Infiniti also recognizes the need to support existing infrastructure and installations where an IP solution is not preferable; for these applications we offer a selection of SDI and LVDS zoom cameras which provide real-time uncompressed video without the need for any network infrastructure.



**20X
Zoom**



**5X
Zoom**

X-Numbers Do Not Necessarily Determine How Far A Camera Can See

When a camera's zoom range is displayed as "10X" or "95X", this is communicating the wide to narrow ratio of a camera's zoom capabilities. These numbers do not tell us how small a field of view the camera will have. In other words, the "X" numbers are not measurements of how "far" it can see and can not be used to calculate this information.

For example, a lens with a zoom range of 5mm to 500mm would be a 100X lens, because it can zoom to 100 times its widest focal point. Yet a lens that measures 500mm to 1000mm would only be a 2X lens, even though it "sees" twice as far as the 5-500mm lens does.


RATING STANDARDS

DORI Ratings




The DORI standard (based on the IEC EN62676-4: 2015 International Standard) defines different levels of detail for Detection (25PPM), Observation (62PPM), Recognition (125PPM), and Identification (250PPM). By using these PPM (pixel per meter) values as guidelines, it is possible to select a specific camera sensor/lens combination and know that it will provide the performance needed in each application. Below are examples of each level of DORI detail.


Note that while Infiniti believes that DORI provides a good general guideline, every application is unique and customers may find more or less detail is necessary for their objectives.

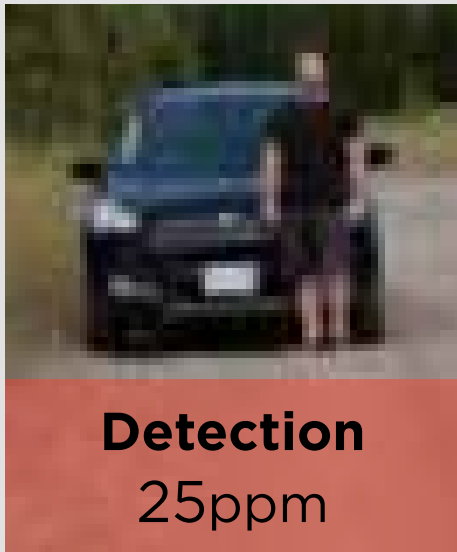


An operator will be able to determine a human presence, although few details about that human will be visible.

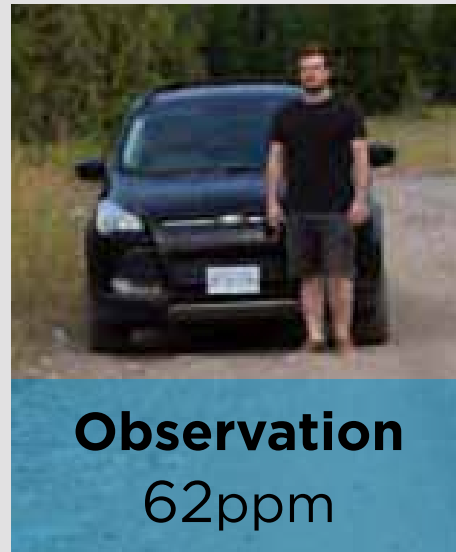

Some characteristic details of the individual, such as distinctive clothing, can start to be seen.

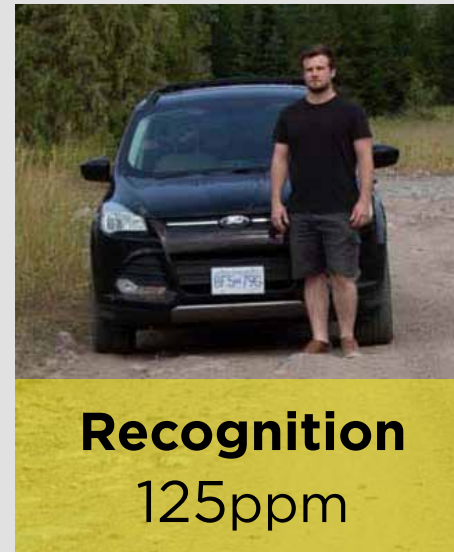

Verify with a high degree of certainty whether an individual is the same as someone you know. License plates become legible under good conditions.

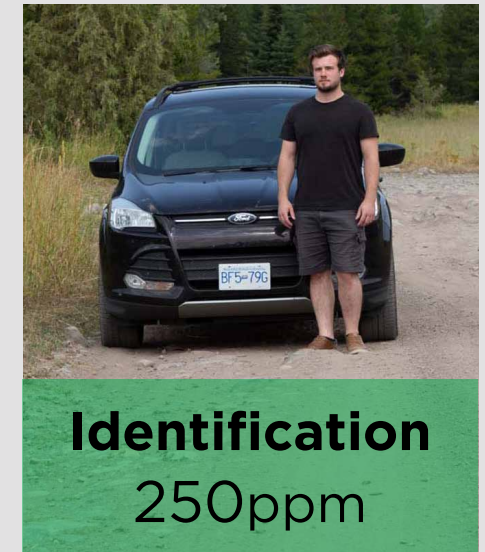

The ability to positively identify a person beyond reasonable doubt. Provides sufficient image quality to identify an individual or clearly read a license plate.

The examples here simulate the amount of detail if you were to digitally zoom into the image. **Please note that these image simulations assume optimum imaging conditions, however many factors such as atmospheric conditions, heat waves, available light, subject motion or camera shake can degrade image clarity, and most of these issues are amplified at longer distances.**

CUSTOMIZATION Enclosures

OEM Modules, Enclosures or PTZ Systems

The lens and sensor options in this brochure are offered as open frame OEM modules or integrated into IP66 weatherproof enclosures. They can also be part of a complete EO/IR PTZ system with optional white light or ZLID™ infrared illumination for high-detail night vision.



LONG-RANGE SURVEILLANCE MODULE

Specifications

2075-LSM

Simulated FOV @ 1km
Click image to preview FOV with different distances and objects in our lens calculator.







Pixels Per Meter @ 1km		553ppm
DORI	D: 25ppm	22,133m Detection
	O: 62ppm	8,925m Observation
	R: 125ppm	4,427m Recognition
	I: 250ppm	2,213m Identification
Output Resolution		2MP/1080p @ 60fps (1920x1080)
Image Sensor		2.0 Megapixel 1/2" W CMOS
Lens	Focal Length	15.4-2075mm (with IZE doubler)
	Zoom	135X Optical Zoom × 4X Digital Zoom

Lens	Field of View	27°-0.2° Horizontal
	1080p Equivalent†	135X, 0.2° HFOV
	Focus	Auto / Manual
Minimum Illumination @ f/1.2		Color: 0.006 Lux, B&W: 0.0006 Lux
Optical Fog Filter (NIR)		Yes
NDAA Compliant		Yes
Video Network	Video Out	IP
	Compression	H.265 / H.264 / MJPEG
	Protocol	ONVIF, HTTP, RTSP, RTP, TCP, UDP
Image Stabilization		Electronic Image Stabilization (EIS)
Image Enhancements		Auto White Balance, 120dB WDR, 3D DNR, BLC
Edge Storage		Supports MicroSD Card up to 256GB
Environmental		IP66 Rugged Weatherproof Enclosure
Dimensions		795mm × 365mm × 245mm**
Weight		Approx 20kg**





*Lens measurements, angle of view and PPM/DORI numbers are accurate to ±10% due to back focus distances, sensor sizes, lens manufacturing, etc. **Dependent on full system configuration. †Zoom ratio and FOV if zoomed into a 1080p crop of the video output.

Specifications

		8M-95X	8M-53X	79X	4M-95X
Simulated FOV @ 1km <i>Click image to preview FOV with different distances and objects in our lens calculator.</i>					
Pixels Per Meter @ 1km		508ppm	400ppm	329ppm	327ppm
DORI	D: 25ppm	20,300m Detection	16,000m Detection	13,173m Detection	13,064m Detection
	O: 62ppm	8,815m Observation	6,452m Observation	5,312m Observation	5,268m Observation
	R: 125ppm	4,060m Recognition	3,200m Recognition	2,635m Recognition	2,613m Recognition
	I: 250ppm	2,030m Identification	1,600m Identification	1,317m Identification	1,306m Identification
Output Resolution		8MP/4K @ 30fps (3840×2160)	8MP/4K @ 30fps (3840×2160)	2MP/1080p @ 30fps (1920×1080)	4MP @ 30fps (2688×1520)
Image Sensor		8.4 Megapixel 1/1.8" W CMOS	8.4 Megapixel 1/1.8" W CMOS	4.1 Megapixel 1/2" W CMOS	4.1 Megapixel 1/1.7" W CMOS
Lens	Focal Length	10.6-1015mm	15-800mm	15.5-1235mm	10-955mm
	Zoom	95X Optical Zoom × 16X Digital	53X Optical Zoom × 16X Digital	79X Optical Zoom × 16X Digital	95X Optical Zoom × 16X Digital
	Field of View	42.0°-0.43° Horizontal	28.7°-0.55° Horizontal	27.0°-0.33° Horizontal	42.9°-0.47° Horizontal
	1080p Equivalent†	190X, 0.22° HFOV	106X, 0.28° HFOV	79X, 0.33° HFOV	133X, 0.34° HOV
	Focus	Auto / Manual	Auto / Manual	Auto / Manual	Auto / Manual
Minimum Illumination		Color: 0.1 Lux @ f/2.1; B&W: 0.01 Lux @ f/2.1	Color: 0.1 Lux @ f/1.5; B&W: 0.01 Lux @ f/1.5	Color: 0.05 Lux @ f/2.1; B&W: 0.005 Lux @ f/2.1	Color: 0.05 Lux @ f/2.1; B&W: 0.005 Lux @ f/2.1
Optical Fog Filter (NIR)		Yes	Yes	Yes	Yes
Heatwave Mitigation		Yes	Yes	Yes	Yes
NDAA Compliant		No	Yes	Optional	No
Video Network	Video Out	IP, LVDS/SDI optional		IP, LVDS/SDI optional	
	Compression	H.265/H.264/MJPEG			
	Protocol	ONVIF, HTTP, RTSP, RTP, TCP, UDP			
Image Stabilization		Electronic Image Stabilization (EIS)	Electronic Image Stabilization (EIS)	Electronic Image Stabilization (EIS)	Electronic Image Stabilization (EIS)
Image Enhancements		Auto White Balance, 100dB WDR, 2D/3D DNR, BLC, HLC, Digital Defog			
Edge Storage		Supports MicroSD Card up to 256GB			
Dimensions & Weight		384mm × 144mm × 150mm, 5.6kg	320mm × 110mm × 110mm, 3.1kg	384mm × 144mm × 150mm, 5.6kg	396mm × 146mm × 150mm, 5.6kg





*Lens measurements, angle of view and PPM/DORI numbers are accurate to ±10% due to back focus distances, sensor sizes, lens manufacturing, etc. †Zoom ratio and FOV if zoomed into a 1080p crop of the video output.

Specifications

		4M-53X	4M-53X-OS	95X	3M-53X-OS
Simulated FOV @ 1km <i>Click image to preview FOV with different distances and objects in our lens calculator.</i>					
Pixels Per Meter @ 1km		274ppm	274ppm	255ppm	228ppm
DORI	D: 25ppm	10,944m Detection	10,944m Detection	10,187m Detection	9,128m Detection
	O: 62ppm	4,413m Observation	4,413m Observation	4,108m Observation	3,680m Observation
	R: 125ppm	2,189m Recognition	2,189m Recognition	2,037m Recognition	1,826m Recognition
	I: 250ppm	1,094m Identification	1,094m Identification	1,019m Identification	913m Identification
Output Resolution		4MP @ 30fps (2688x1520)	4MP @ 30fps (2688x1520)	2MP/1080p @ 30fps (1920x1080)	3MP @ 55fps (2048x1536)
Image Sensor		4.1 Megapixel 1/1.7" W CMOS	4.1 Megapixel 1/1.7" W CMOS	2.4 Megapixel 1/2" W CMOS	3.2 Megapixel 1/1.8" CMOS w/GS++
Lens	Focal Length	15-800mm	15-800mm	10-955mm	15-800mm
	Zoom	53X Optical Zoom × 16X Digital	53X Optical Zoom × 16X Digital	95X Optical Zoom × 16X Digital	53X Optical Zoom × 16X Digital
	Field of View	29.4°-0.56° Horizontal	29.4°-0.56° Horizontal	39.6°-0.43° Horizontal	26.9°-0.51° Horizontal
	1080p Equivalent†	74X, 0.4° HOV	74X, 0.4° HOV	95X, 0.43° HFOV	56X, 0.48° HFOV
	Focus	Auto / Manual	Auto / Manual	Auto / Manual	Auto / Manual
Minimum Illumination		Color: 0.05 Lux @ f/2.8; B&W: 0.005 Lux @ f/2.8	Color: 0.05 Lux @ f/2.8; B&W: 0.005 Lux @ f/2.8	Color: 0.02 Lux @ f/2.0; B&W: 0.001 Lux @ f/2.0	Color: 0.05 Lux @ f/2.8; B&W: 0.005 Lux @ f/2.8
Optical Fog Filter (NIR)		Yes	Yes	Yes	Yes
Heatwave Mitigation		Yes	Yes	No	Yes
NDAA Compliant		No	No	Optional	No
Video Network	Video Out	IP, LVDS/SDI optional	IP, LVDS/SDI optional	IP, LVDS/SDI optional	IP, LVDS/SDI optional
	Compression	H.265/H.264/MJPEG			
	Protocol	ONVIF, HTTP, RTSP, RTP, TCP, UDP			
Image Stabilization		Electronic Image Stabilization (EIS)	Optical Stabilization & EIS	Electronic Image Stabilization (EIS)	Optical Stabilization & EIS
Image Enhancements		Auto White Balance, 100dB WDR, 2D/3D DNR, BLC, HLC, Digital Defog	Auto White Balance, WDR, 2D/3D DNR, BLC, HLC, Digital Defog	Auto White Balance, WDR, 2D/3D DNR, BLC, HLC, Digital Defog	Auto White Balance, WDR, 2D/3D DNR, BLC, HLC, Digital Defog
Edge Storage		Supports MicroSD Card up to 256GB			
Dimensions & Weight		320mm × 110mm × 110mm, 3.1kg	320mm × 110mm × 110mm, 3.3kg	396mm × 146mm × 150mm, 5.6kg	320mm × 110mm × 110mm, 3.3kg

*Lens measurements, angle of view and PPM/DORI numbers are accurate to ±10% due to back focus distances, sensor sizes, lens manufacturing, etc. †Zoom ratio and FOV if zoomed into a 1080p crop of the video output.

Specifications

		59X	59X-OS	8M-49X	88X
Simulated FOV @ 1km <i>Click image to preview FOV with different distances and objects in our lens calculator.</i>					
Pixels Per Meter @ 1km		214ppm	214ppm	136ppm	128ppm
DORI	D: 25ppm	8,550m Detection	8,550m Detection	5,440m Detection	5,100m Detection
	O: 62ppm	3,447m Observation	3,447m Observation	2,194m Observation	2,056m Observation
	R: 125ppm	1,710m Recognition	1,710m Recognition	1,088m Recognition	1,020m Recognition
	I: 250ppm	855m Identification	855m Identification	544m Identification	510m Identification
Output Resolution		2MP/1080p @ 30fps (1920x1080)	2MP/1080p @ 30fps (1920x1080)	8MP/4K @ 30fps (3840x2160)	2MP/1080p @ 30fps (1920x1080)
Image Sensor		4.1 Megapixel 1/1.7" W CMOS	4.1 Megapixel 1/1.7" W CMOS	8.4 Megapixel 1/1.8" W CMOS	8.4 Megapixel 1/1.8" W CMOS
Lens	Focal Length	14.8-875mm	14.8-875mm	5.6-272mm	5.8-510mm
	Zoom	59X Optical Zoom × 16X Digital	59X Optical Zoom × 16X Digital	49X Optical Zoom × 16X Digital	88X Optical Zoom × 16X Digital
	Field of View	29.8°-0.51° Horizontal	29.8°-0.51° Horizontal	75°-1.62° Horizontal	65.2°-0.86° Horizontal
	1080p Equivalent†	59X, 0.51° HFOV	59X, 0.51° HFOV	98X, 0.81° HFOV	88X Zoom, 0.86° HFOV
	Focus	Auto / Manual	Auto / Manual	Auto / Manual	Auto / Manual
Minimum Illumination		Color: 0.05 Lux @ f/2.8; B&W: 0.005 Lux @ f/2.8	Color: 0.05 Lux @ f/2.8; B&W: 0.005 Lux @ f/2.8	Color: 0.05 Lux @ f/1.4; B&W: 0.005 Lux @ f/1.4	Color: 0.05 Lux @ f/1.4; B&W: 0.005 Lux @ f/1.4
Optical Fog Filter (NIR)		Yes	Yes	Yes	Yes
Heatwave Mitigation		Yes	Yes	No	Yes
NDAA Compliant		Optional	Optional	Yes	Optional
Video Network	Video Out	IP, LVDS/SDI optional	IP, LVDS/SDI optional	IP	IP, LVDS/SDI optional
	Compression	H.265/H.264/MJPEG			
	Protocol	ONVIF, HTTP, RTSP, RTP, TCP, UDP			
Image Stabilization		Electronic Image Stabilization (EIS)	Optical Stabilization & EIS	Electronic Image Stabilization (EIS)	Electronic Image Stabilization (EIS)
Image Enhancements		Auto White Balance, WDR, 2D/3D DNR, BLC, HLC, Digital Defog			
Edge Storage		Supports MicroSD Card up to 256GB			
Dimensions & Weight		320mm × 110mm × 110mm, 3.1kg	320mm × 110mm × 110mm, 3.3kg	176mm × 73mm × 78mm, 900g	176mm × 73mm × 78mm, 900g





*Lens measurements, angle of view and PPM/DORI numbers are accurate to ±10% due to back focus distances, sensor sizes, lens manufacturing, etc. †Zoom ratio and FOV if zoomed into a 1080p crop of the video output. ††Global shutter.

Specifications

		8M-36X	4M-49X	3M-49X	4M-36X
Simulated FOV @ 1km <i>Click image to preview FOV with different distances and objects in our lens calculator.</i>					
Pixels Per Meter @ 1km		109ppm	93ppm	78ppm	75ppm
DORI	D: 25ppm	4,360m Detection	3,721m Detection	3,103m Detection	2,982m Detection
	O: 62ppm	1,758m Observation	1,500m Observation	1,251m Observation	1,202m Observation
	R: 125ppm	872m Recognition	744m Recognition	621m Recognition	596m Recognition
	I: 250ppm	436m Identification	372m Identification	310m Identification	298m Identification
Output Resolution		8MP/4K @ 30fps (3840×2160)	4MP @ 30fps (2688×1520)	3MP @ 55fps (2048×1536)	4MP @ 60fps (2688×1520)
Image Sensor		8.4 Megapixel 1/1.8" W CMOS	4.1 Megapixel 1/1.7" W CMOS	3.2 Megapixel 1/1.8" CMOS w/GS ⁺⁺	4.5 Megapixel 1/1.7" W CMOS
Lens	Focal Length	6–218mm	5.6–272mm	5.6–272mm	6–218mm
	Zoom	36X Optical Zoom × 16X Digital	49X Optical Zoom × 16X Digital	49X Optical Zoom × 16X Digital	36X Optical Zoom × 16X Digital
	Field of View	65.2°–2.02° Horizontal	76.3°–1.66° Horizontal	71.4°–1.51° Horizontal	66.4°–2.07° Horizontal
	1080p Equivalent†	72X Zoom, 1.01° HFOV	68X Zoom, 1.18° HFOV	52X, 1.42° HFOV	50X, 1.48° HFOV
	Focus	Auto/Manual	Auto / Manual	Auto/Manual	Auto/Manual
Minimum Illumination		Color: 0.1 Lux @ f/1.5; B&W: 0.01 Lux @ f/1.5	Color: 0.005 Lux @ f/1.4; B&W: 0.0005 Lux @ f/1.4	Color: 0.005 Lux @ f/1.4; B&W: 0.001 Lux @ f/1.4	Color: 0.005 Lux @ f/1.5; B&W: 0.0005 Lux @ f/1.5
Optical Fog Filter (NIR)		Yes	Yes	Yes	Yes
Heatwave Mitigation		No	No	No	No
NDAA Compliant		Yes	No	No	Yes
Video Network	Video Out	IP	IP, LVDS/SDI optional	IP	IP
	Compression	H.265/H.264/MJPEG			
	Protocol	ONVIF, HTTP, RTSP, RTP, TCP, UDP			
Image Stabilization		Electronic Image Stabilization (EIS)			
Image Enhancements		Auto White Balance, WDR, 2D/3D DNR, BLC, HLC, Digital Defog	Auto White Balance, WDR, 2D/3D DNR, BLC, HLC, Digital Defog	Auto White Balance, 100dB WDR, 2D/3D DNR, BLC, HLC, Digital Defog	Auto White Balance, WDR, 2D/3D DNR, BLC, HLC, Digital Defog
Edge Storage		Supports MicroSD Card up to 256GB			
Dimensions		139mm × 66mm × 76mm, 410g	176mm × 73mm × 78mm, 900g	176mm × 73mm × 78mm, 900g	139mm × 66mm × 68mm, 410g




*Lens measurements, angle of view and PPM/DORI numbers are accurate to ±10% due to back focus distances, sensor sizes, lens manufacturing, etc. †Zoom ratio and FOV if zoomed into a 1080p crop of the video output. ††Global shutter.

Specifications

		4M-30X	8M-20X	4M-24X	30X
Simulated FOV @ 1km <i>Click image to preview FOV with different distances and objects in our lens calculator.</i>					
Pixels Per Meter @ 1km		72ppm	66ppm	60ppm	50ppm
DORI	D: 25ppm	2,873m Detection	2,640m Detection	2,394m Detection	1,982m Detection
	O: 62ppm	1,158m Observation	1,065m Observation	965m Observation	799m Observation
	R: 125ppm	575m Recognition	528m Recognition	479m Recognition	396m Recognition
	I: 250ppm	287m Identification	264m Identification	239m Identification	198m Identification
Output Resolution		4MP @ 30fps (2688x1520)	8MP/4K @ 30fps (3840x2160)	4MP @ 30fps (2688x1520)	2MP/1080p @ 60fps (1920x1080)
Image Sensor		4.1 Megapixel 1/2.9" CMOS	8.4 Megapixel 1/1.8" W CMOS	4.1 Megapixel 1/2.9" CMOS	2.4 Megapixel 1/2.8" CMOS
Lens	Focal Length	4.7-141mm	6.6-132mm	5-120mm	4.8-144mm
	Zoom	30X Optical Zoom × 16X Digital	20X Optical Zoom × 16X Digital	24X Optical Zoom × 16X Digital	30X Optical Zoom × 16X Digital
	Field of View	67.9°-2.14° Horizontal	62.5°-3.3° Horizontal	56.6°-2.57° Horizontal	69.8°-2.22° Horizontal
	1080p Equivalent†	42X, 1.53° HFOV	40X, 1.65° HFOV	33X, 1.84° HFOV	30X, 2.22° HFOV
	Focus	Auto/Manual	Auto/Manual/Semi-Auto	Auto/Manual	Auto/Manual
Minimum Illumination		Color: 0.005 Lux @ f/1.5; B&W: 0.0005 Lux @ f/1.5	Color: 0.005 Lux @ f/1.5; B&W: 0.01 Lux @ f/1.5	Color: 0.005 Lux @ f/1.5; B&W: 0.0005 Lux @ f/1.5	Color: 0.005 Lux @ f/1.5; B&W: 0.0005 Lux @ f/1.5
Optical Fog Filter (NIR)		No	No	No	No
Heatwave Mitigation		No	Optional	No	No
NDAA Compliant		Yes	Yes	Yes	Yes
Video Network	Video Out	IP, LVDS/SDI optional	IP	IP, LVDS/SDI optional	IP, LVDS/SDI optional
	Compression	H.265/H.264/MJPEG			
	Protocol	ONVIF, HTTP, RTSP, RTP, TCP, UDP			
Image Stabilization		Electronic Image Stabilization (EIS)			
Image Enhancements		Auto White Balance, WDR, 2D/3D DNR, BLC, HLC, Digital Defog			
Edge Storage		Supports MicroSD Card up to 256GB			
Dimensions & Weight		97mm × 52mm × 59mm, 285g	64mm × 42mm × 51mm, 148g	97mm × 52mm × 59mm, 285g	97mm × 52mm × 59mm, 285g

*Lens measurements, angle of view and PPM/DORI numbers are accurate to ±10% due to back focus distances, sensor sizes, lens manufacturing, etc. †Zoom ratio and FOV if zoomed into a 1080p crop of the video output. ‡Global shutter.

Specifications

		8M-8X	12M-3X	33M-24
Simulated FOV @ 1km <i>Click image to preview FOV with different distances and objects in our lens calculator.</i>				
Pixels Per Meter @ 1km		27.5ppm	9.4ppm	5.1ppm
DORI	D: 25ppm	1,101m Detection	390m Detection	205m Detection
	O: 62ppm	444m Observation	157m Observation	83m Observation
	R: 125ppm	220m Recognition	78m Recognition	41m Recognition
	I: 250ppm	110m Identification	39m Identification	20m Identification
Output Resolution		8MP/4K @ 30fps (3840×2160)	12MP/4K @ 20fps (4000×3000)	8K @ 15fps (7680×4320)
Image Sensor		8.4 Megapixel 1/2.8" CMOS	12.9 Megapixel 1/2.3" CMOS	33 Megapixel 24×36mm CMOS
Lens	Focal Length	5–40mm	3.9–14.5mm	24mm (other options available)
	Zoom	8X Optical Zoom, 16X Digital	3.5X Optical Zoom, 16X Digital	32X Digital Zoom
	Field of View	58.3°–8.0° Horizontal	74.6°–24.0° Horizontal	62.1° Horizontal
	1080p Equivalent†	16X, 4.0° HFOV	7X, 11.5° HFOV	4X, 15.6° HFOV
	Focus	Auto/Manual/Semi-Auto	Auto/Manual/Semi-Auto	Auto/Manual
Minimum Illumination		Color: 0.01 Lux @ f/1.5; B&W: 0.001 Lux @ f/1.5	Color: 0.5 Lux @ f/2.4; B&W: 0.05 Lux @ f/2.4	Color: 0.015 Lux @ f/1.4; B&W: 0.0015 Lux @ f/1.4
Optical Fog Filter (NIR)		No	No	No
Heatwave Mitigation		No	No	No
NDAA Compliant		Yes	Yes	Yes
Video Network	Video Out	IP	IP	IP
	Compression	H.265/H.264/MJPEG		
	Protocol	ONVIF, HTTP, RTSP, RTP, TCP, UDP		
Image Stabilization		Electronic Image Stabilization (EIS)	Electronic Image Stabilization (EIS)	None
Image Enhancements		Auto White Balance, WDR, 2D/3D DNR, BLC, HLC, Digital Defog		Auto White Balance, DWDR, BLC
Edge Storage		Supports MicroSD Card up to 256GB		
Dimensions & Weight		65mm × 42mm × 51mm, 146g	56mm × 30mm × 40mm, 55g	120mm × 119mm × 262mm, 2.75kg

*Lens measurements, angle of view and PPM/DORI numbers are accurate to ±10% due to back focus distances, sensor sizes, lens manufacturing, etc. †Zoom ratio and FOV if zoomed into a 1080p crop of the video output.



CUSTOM LONG-RANGE CAMERA SYSTEMS

ZLID • VISIBLE • IR • THERMAL • SWIR • GYRO



Contact us today:

WWW.INFINITIOPTICS.COM

1-866-969-6463

INFO@INFINITIOPTICS.COM